



E08

elements™



environmentally responsible
maintenance solutions

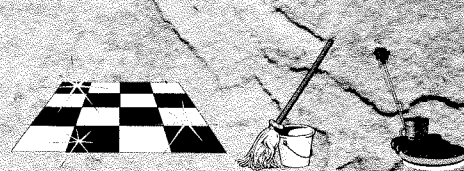

Zinc Free Floor Finish

pulimento de piso

An environmentally preferable Zinc-free floor seal and finish formulated with the most advanced polymer technology. Meets today's need for a product that contains no zinc or other heavy metals that can be harmful to wastewater treatment systems. This low odor finish has exceptional durability and flexibility and can be maintained with scrub and recoat procedures, spray buffing or high speed burnishing.



This product meets Green Seal's environmental standard for industrial and institutional floor care products based on its reduced human and aquatic toxicity and reduced smog production potential.



FLOOR COATING AND FINISHING MATERIAL
AS TO SLIP RESISTANCE ONLY
17SU

ENVIRONMENTALLY RESPONSIBLE COMPARISON

| Traditional Products | elements |
|---|--|
| Zinc cross-linked acrylic and modified-acrylic emulsion polymer | None |
| Formaldehyde | None |
| | Zinc-free cross-linked polymers |
| | 1,2-benzisothiazoline-3-one |
| Traditional Compound Descriptions: | elements Compound Descriptions: |
| <p>Zinc cross-linked acrylic and modified-acrylic emulsion polymer – is used as a binder in floor finish and sealers. Trace amount of zinc may cause problems with toxicity of sewage effluent and meeting discharge permit requirement.</p> <p>Formaldehyde – is commonly used as a preservative in coatings as well as detergents. However, it is a suspect carcinogen.</p> | <p>Zinc-free cross-linked polymers – is used as a binder in floor finish and sealers. It reduces toxicity of sewage effluent.</p> <p>1,2-benzisothiazoline-3-one – is an efficient microbiostat preservative for aqueous compositions such as floor finish and sealers. Low corrosivity and low odor. It is not suspected carcinogens.</p> |

PRODUCT SPECIFICATIONS

| | | | |
|----------------------|------------------------|------------------------|--|
| Non-volatile Solids: | 20.0 ± 0.5% | Buffability: | Spray buffing or high speed burnishing |
| Color: | Milky emulsion | Removability: | With instant type strippers |
| Odor: | Low | Detergent Resistance: | Excellent |
| pH: | 8.0 – 9.0 | VOC Content: | 0.34 lbs./gal. |
| Dry/Recoat Time: | 45 minutes min. | Storage/Stability: | 1 year |
| Slip Resistance: | 0.5 min. by ASTM-D2047 | Weight Per Gallon: | 8.50 lbs./gal. |
| Durability: | Excellent | Freeze/Thaw Stability: | Keep from freezing |